


ENERGIZER EPX625G

Miniature Alkaline




Industry Standard Dimensions



Designed specifically for photo use

Typical Discharge Characteristics

21°C (70°F)



Schedule:	Typical Drains: at 1.25V	Load	Cutoff 0.9V
	(milliamperes)	(ohms)	(hours)
Continuous	0.5	2,500	355

General Information

Chemical System: Manganese Dioxide (MnO₂)

Designation: N/A **Nominal Voltage:** 1.5 Volts


Typical Capacity: 175 mAh (to 0.9 volts)

Rated at 2.5K ohms / 21°C (70°F)

Typical Weight: 3.3 grams (0.12 ounces)

Typical Volume: 1.2 cubic centimeters (0.07 cubic inch)

Cross Section

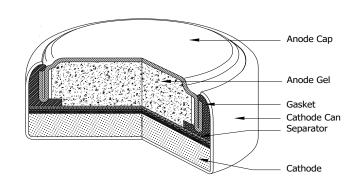

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

Contents herein do not constitute a warranty and are for refrence only.

Form No.EPX625GGL0121 Page 1 of 1